

## QUICK GUIDE

# Somfy® External Li-ion Rechargeable Battery Pack

To avoid errors and save valuable time, please read these instructions before installing your external rechargeable battery pack.

## GETTING STARTED

Thank you for purchasing an External Rechargeable Li-ion Battery Pack. All of the required installation components are enclosed in your package along with these instructions. Please thoroughly review these instruction before beginning the installation.

- Be certain you have the correct Somfy plug-in charger for your battery pack (see Ref/fig below #9025166)
- Battery should be charged completely prior to installation.
- Ensure you comply with the recharging instructions.
- The optimum recharging temperature is between 32°F and 113°F.
- Do not disassemble or alter the battery.
- Must only be used with Somfy External Battery WireFree motors (refer to the motor instructions for programming).
- Do not use or install this product outdoors.
- Product must never be dropped, immersed in water or exposed to flammable materials.
- Battery pack should always be replaced with Somfy certified replacement.

**External Li-ion Rechargeable Battery Pack #9021217 items include:**



1 Battery



(1 Pair) of Wall/Ceiling Mount Brackets  
(1 Pair) of Headrail Mount Brackets  
(1 Pair) of screws and mounting anchors


**Accessories:**



Charger with 6ft Cable  
#9025166



8" Charger External Cable  
#9021131  
(Wood & Fauxwood Blinds Only)

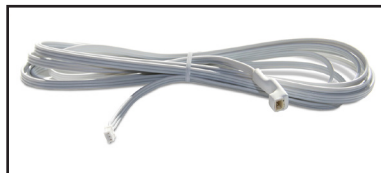


94.5" Charger Extension Cable  
#9021016




Motor Extension Cable  
10" - #9018623  
48" - #9016736  
96" - #9018624

## Mounting Methods

A) With a wall/ceiling bracket.



B) With a headrail mounting bracket.

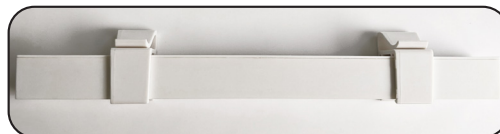

1020968

## Charging Li-ion Battery Pack

**Note:** When using tubular motors with LED indicator on the motorhead LED will slowly blink (red) when battery requires charging.



### STEP 1


If battery pack charging port is accessible simply plug charger into battery pack charging port and skip to STEP 4. *If battery charging port is not accessible, follow STEP 2.*

**NOTE:** Using battery charging accessory (Ref. 9021131 or 9021016) illustrated above can facilitate access to the battery pack charging port.




### STEP 3

Attach small connector from wall charger to charging port of battery pack. Use embedded logo of the charging connector as an orientation indicator.

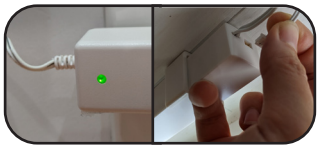

### STEP 5

Once LED illuminates GREEN, battery is fully charged. Disconnect wall charger connector from battery charging port, then remove wall charger from electrical outlet.

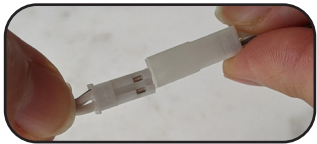


### STEP 7

Reconnect battery pack cable connector to motor cable connector.



### STEP 2

Disconnect battery pack cable connector from motor cable connector, then simply remove battery pack from brackets to charge.

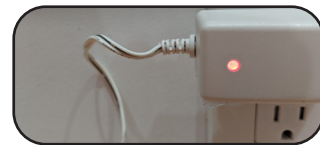

### STEP 4

Plug Wall charger into a nearby electrical outlet. The LED indicator will illuminate RED while battery is charging.



### STEP 6

If battery was removed from brackets for charging, simply reinstall battery pack into mounting brackets.



### STEP 8

Manage the placement of all cords making certain they do not interfere with movement of window covering. Be certain motor antenna is exposed for optimal radio performance.