

Somfy Factory Reset Instructions for 24V DC and 120V AC RTS Motors

24V DC RTS Motors:


#1241142 ST30 24V DC RTS Factory Reset

1. Press and Hold the programming button located on the motorhead for 3 consecutive jogs (~10sec).



#1134023 504 ULTRA 24V DC RTS Factory Reset


2. Press and Hold all 3 buttons on the motorhead (UP, STOP and DOWN) at the same time for 3 consecutive jogs (~10sec).

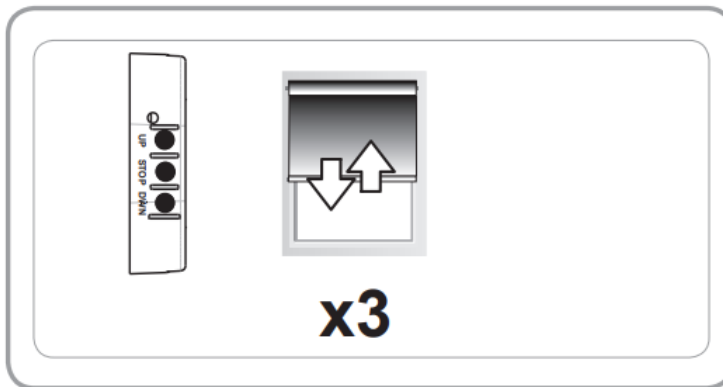

120V AC RTS Motors:

Resetting Altus RTS 120 V AC

Perform a Dual Power Cut to delete all previous settings

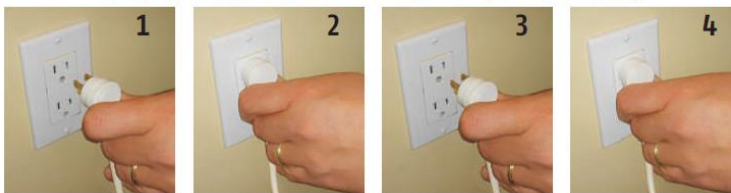

2 Seconds

10 Seconds

2 Seconds

Shade starts to move.

When the shade stops press and hold the programming button of any transmitter until the shade jogs twice.

Do not release the programming button until the jogging is complete or you will have to start the dual power cut from the beginning.

