

brilliant

INTEGRATION for
TAHOMA[®] RTS



TABLE OF CONTENTS

I.	INTRODUCTION -----	3
II.	OVERVIEW -----	4
	DESCRIPTION	
	RESOURCES & APPLICATIONS	
	SYSTEM REQUIREMENTS	
III.	INSTALLATION -----	5
	CONNECTIONS & INDICATORS	
IV.	SYSTEM PREPARATION -----	6
	SOMFY SYSTEM	
	BRILLIANT SYSTEM	
V.	SETUP -----	6
	LINK TAHOMA TO BRILLIANT	
	ADD DEVICES	
	CONTROL TAHOMA DEVICES	
	CREATE SCENES	
	TEST THE SCENE	
	EDIT A SCENE	
	DELETE A SCENE	
	APPENDIX -----	14
	A. ENABLE/DISABLE THIRD PARTY INTEGRATION	
	B. AVAILABLE COMMANDS & ACTIONS	

I. INTRODUCTION

The Somfy Organization's strength has been demonstrated with 50 years of experience in motorization. As leaders in the shading industry with innovative and modern solutions for homes and commercial buildings, Somfy offers the widest range of strong, quiet motors and controls for all types of applications and technologies.

Who is this Guide for?

This guide is aimed at providing support and guidance to Brilliant homeowners, installers and dealers for achieving complete automation of Radio Technology Somfy® (RTS) motors and TaHoma® Smartphone and Tablet Interface.

What does this Guide contain?

The sections of this guide contain walkthroughs and methods of controlling RTS motors using the TaHoma® Smartphone and Tablet Interface as the bridge between Brilliant Smart Home System and Smart Shading by Somfy.

For questions or assistance please contact technical support:
(800) 22-SOMFY (76639)
technicalsupport_us@somfy.com

How should this Guide be used?

This guide is intended to be used as a reference manual.

II. OVERVIEW

DESCRIPTION

The Somfy TaHoma® Smartphone and Tablet Interface provides a single platform for Somfy RTS and future ecosystems with a wide range of interior and exterior applications.

- The TaHoma Interface supports up to 40 RTS channels
- The TaHoma Interfaces can support a maximum of 40 scenes with schedules per install

Each TaHoma Interface is connected to Wi-Fi or directly to the local area network by an optional TaHoma Ethernet Adaptor for IP Integration with third-party control systems. TaHoma is compatible with the Somfy Synergy™ API.

Details of this controller and commissioning instructions are available in the Somfy TaHoma Smartphone and Tablet Interface Programming Guide.

RESOURCES & APPLICATIONS

Visit www.somfypro.com for the following guides:

- [Somfy TaHoma Smartphone and Tablet Interface Programming Guide](#)
 - [Somfy RTS Pocket Programming Guide](#)

Subscribe to the Somfy YouTube Channel www.youtube.com/somfysystems

Visit the Google Play or iOS App Store for the Somfy TaHoma North America App:



Google Play Store



iOS App Store

SYSTEM REQUIREMENTS

The TaHoma app is compatible with the following operating systems and software versions:

iOS 11.0+

Android 7.0+

brilliant
SMART HOME SYSTEM

III. INSTALLATION

CONNECTIONS & INDICATORS

REAR



Configuration Button
Press to enter Wi-Fi Mode for setup

Micro USB Port
Connect power or Ethernet Adaptor

PLUG-IN POWER SUPPLY REQUIRED (Included with TaHoma Interface)

Connect to line-voltage to power TaHoma Interface

Power Supply
Plug-in Transformer to line-voltage outlet

Micro USB
Connect power to TaHoma Interface



Standard USB
Connect cable to Transformer

FRONT



LED BEHAVIOR:

BLUE

DIRECTLY CONNECTED
Wi-Fi MODE

RED

POWERED,
NOT CONNECTED
TO CLOUD SERVER

ORANGE
STARTING UP

GREEN

CONNECTED TO NETWORK


TaHoma® Ethernet Adaptor #1870470 (Sold Separately)

Connect for a wired local area network connection

Micro USB
Connect to TaHoma Interface for power and Ethernet

Ethernet Port
Connect to network router or switch

Micro USB Port
Connect power through Ethernet Adaptor

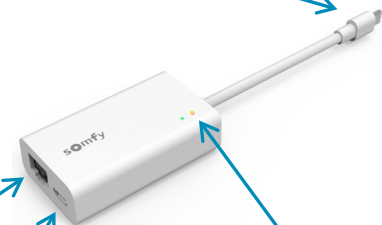

LED BEHAVIOR:

GREEN

ETHERNET CONNECTION

YELLOW

DATA TRANSFER

IV. SYSTEM PREPARATION

SOMFY SYSTEM

A fully operational TaHoma system is required prior to Brilliant programming. The TaHoma Interface supports up to 40 channels of RTS. RTS devices programmed to an RTS channel will only receive commands from the associated TaHoma Interface. Interfaces must be placed within 25-35' of the RTS devices they control.

- Confirm with Shade Commissioning Agent that the TaHoma Interface firmware is up to date
- Confirm that TaHoma is connected to the same network as the Brilliant Control

BRILLIANT SYSTEM

A fully operational Brilliant system is required prior to TaHoma integration.

- Confirm that Brilliant is powered on and connected to a network with internet
 - Confirm Brilliant IOS/Android application is up to date
 - Brilliant supports one TaHoma Gateway per system

V. SETUP

LINK TAHOMA TO BRILLIANT

To link TaHoma to the Brilliant Control, follow the steps below:

From the Brilliant Control screen:

- 1) SELECT "Add Device" on the bottom tray

Note: If there are multiple TaHoma Gateways, please contact the Brilliant Support Team.

Brilliant Support Team:


Phone: +1 (855) 650-0940

Email: support@brilliant.tech

<https://support.brilliant.tech/hc/en-us>



2) SELECT "SOMFY"


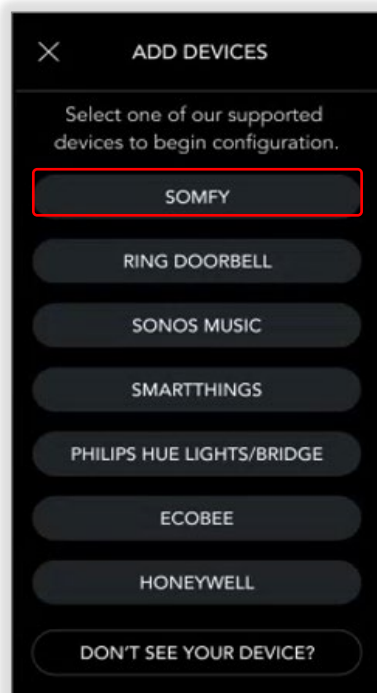


3) SELECT "Continue" to link accounts

4) Follow the on-screen instructions to enable Third-Party Integration

See Appendix A of this guide for Third-Party Integration instructions



5) SELECT "Continue"

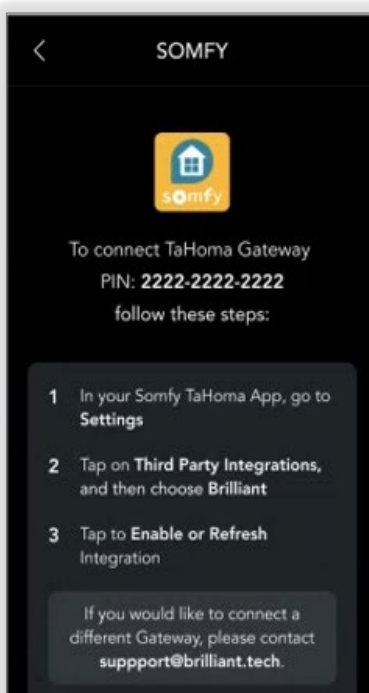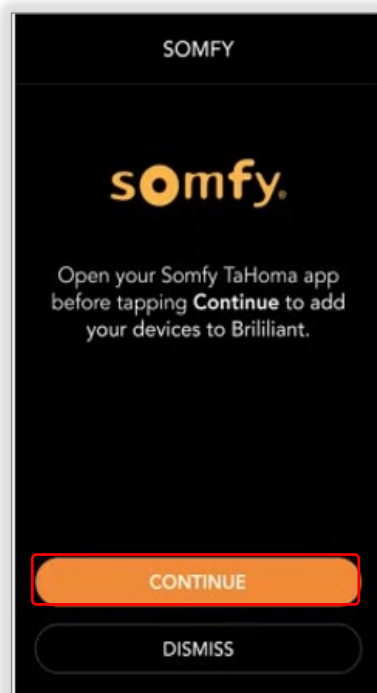

ADD DEVICES

To add discovered Somfy devices to rooms, follow the steps below:



- 1) SELECT "SELECT ALL" or SELECT the individual Somfy devices to be added
- 2) SELECT "CONTINUE"
- 3) SELECT a Room to add the Somfy devices or SELECT "ADD NEW ROOM"
- 4) SELECT "CONTINUE"
- 5) SELECT "OK"

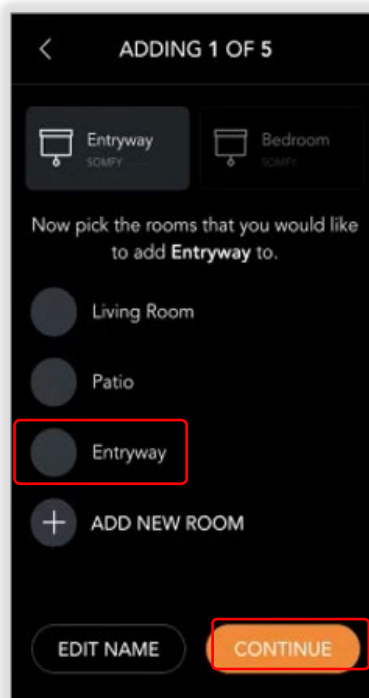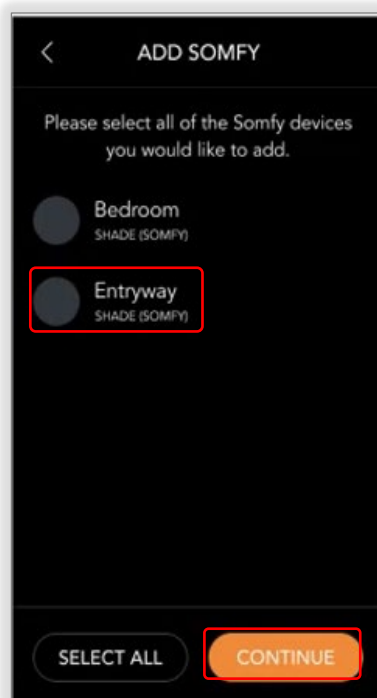

CONTROL TAHOMA DEVICES

To operate RTS shades, follow the steps below:
Brilliant Control does not keep a record of the last commands sent for Somfy RTS motors.
See Appendix B of this guide for a list of Somfy TaHoma specific commands and actions.




- 1) SELECT "Shades"
- 2) SELECT a Command for the shade to be controlled

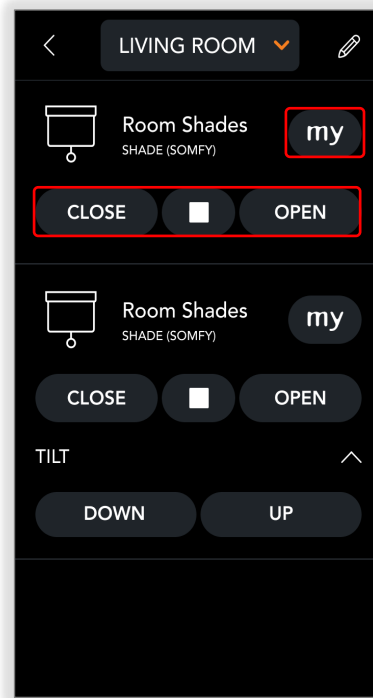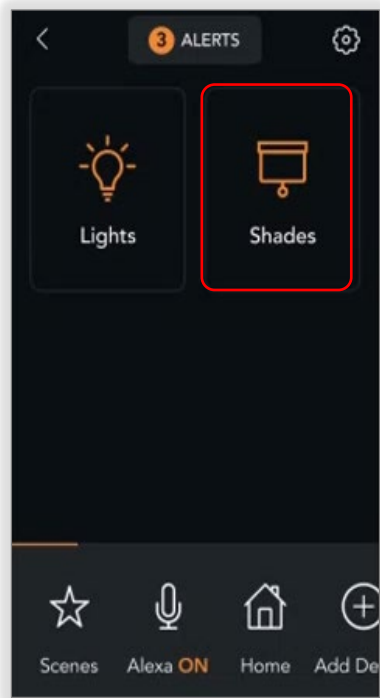



CREATE SCENES

To create scenes, follow the steps below:
See Appendix B of this guide for a list of Somfy TaHoma specific commands and actions.


- 1) SELECT "Scenes" on the bottom tray
- 2) SELECT "CREATE SCENE"
- 3) SELECT the Pencil icon to change the scene image
- 4) ENTER a name for the scene
Example: Good Morning
- 5) SELECT "NEXT"
- 6) SELECT "ADD NEW ACTION"

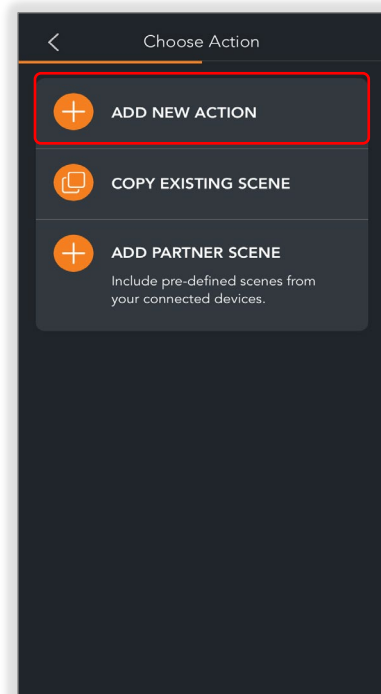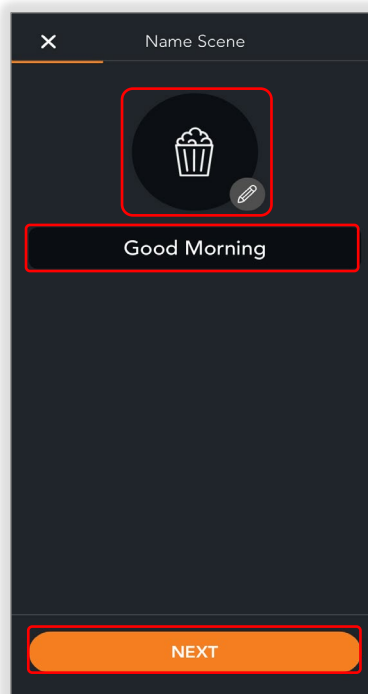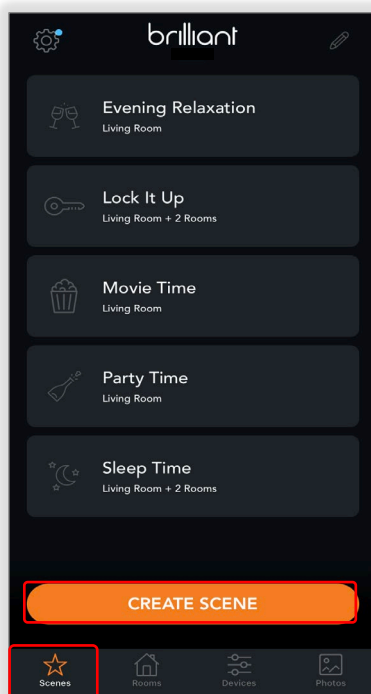

- 7) SELECT a Room
- 8) SELECT a Shade
- 9) SELECT a Command
- 10) SELECT "ADD ACTION" when complete
- 11) SELECT "SET TIME"

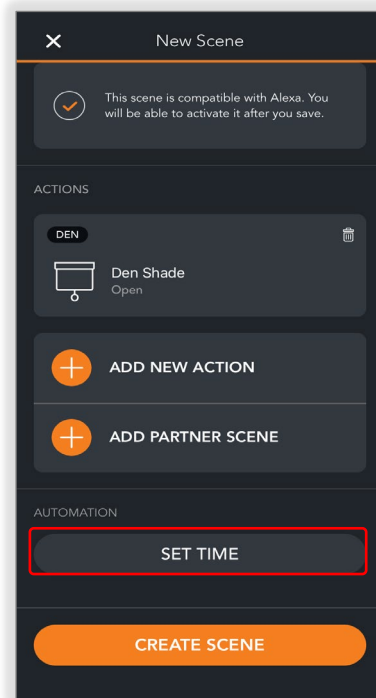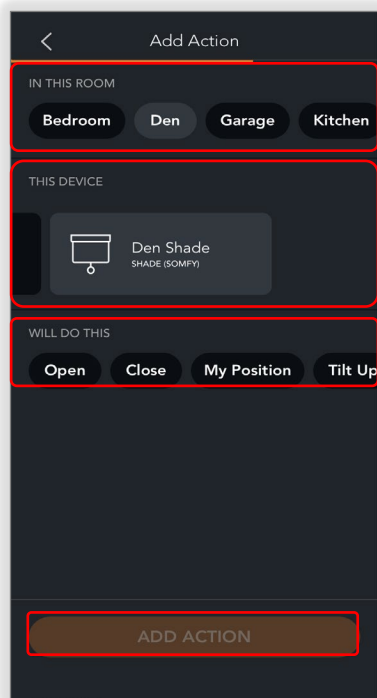


- 7) SELECT a "SET TIME"
Example: Sunrise, Sunset, Time of day
- 8) SELECT the Days to repeat
- 9) SELECT a Start/end date
Example: All year or select a date
- 10) SELECT "SAVE"

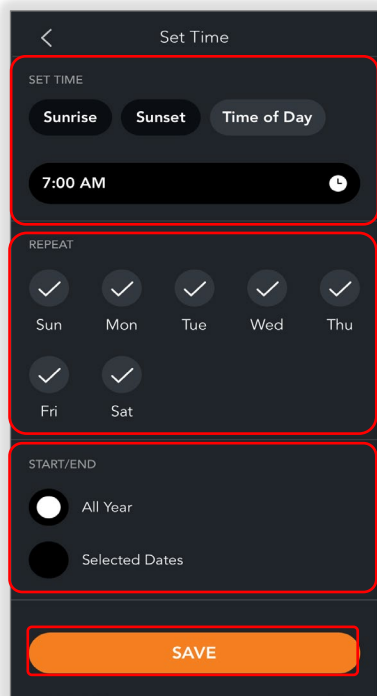

TEST THE SCENE

To test a scene, follow the steps below:


- 1) SELECT "Scenes" on the bottom tray
- 2) SELECT a Scene to execute
Example: "Good morning"

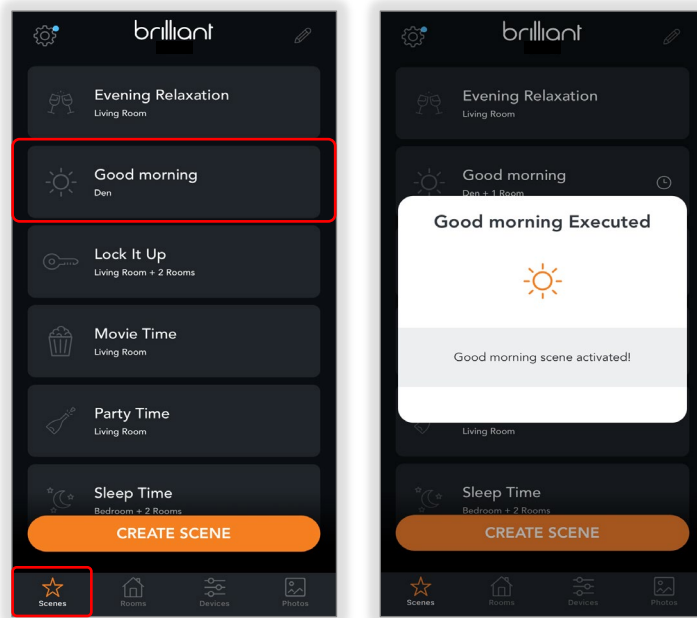

EDIT A SCENE

To edit a scene, follow the steps below:


- 1) SELECT "Scenes" on the bottom tray
- 2) SELECT the Pencil icon
- 3) SELECT the Scene to edit
- 4) SELECT "SAVE" when complete

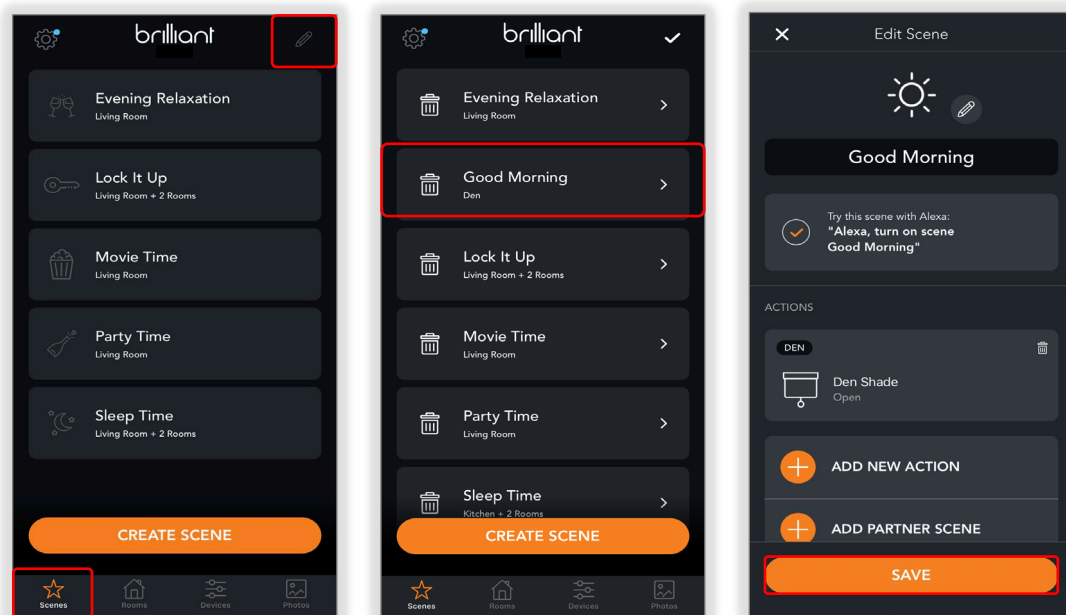

DELETE A SCENE

To delete a scene, follow the steps below:


- 1) SELECT "Scenes" on the bottom tray
- 2) SELECT the Pencil icon
- 3) SELECT the Trash icon next to the scene to be deleted
- 4) SELECT "DELETE"

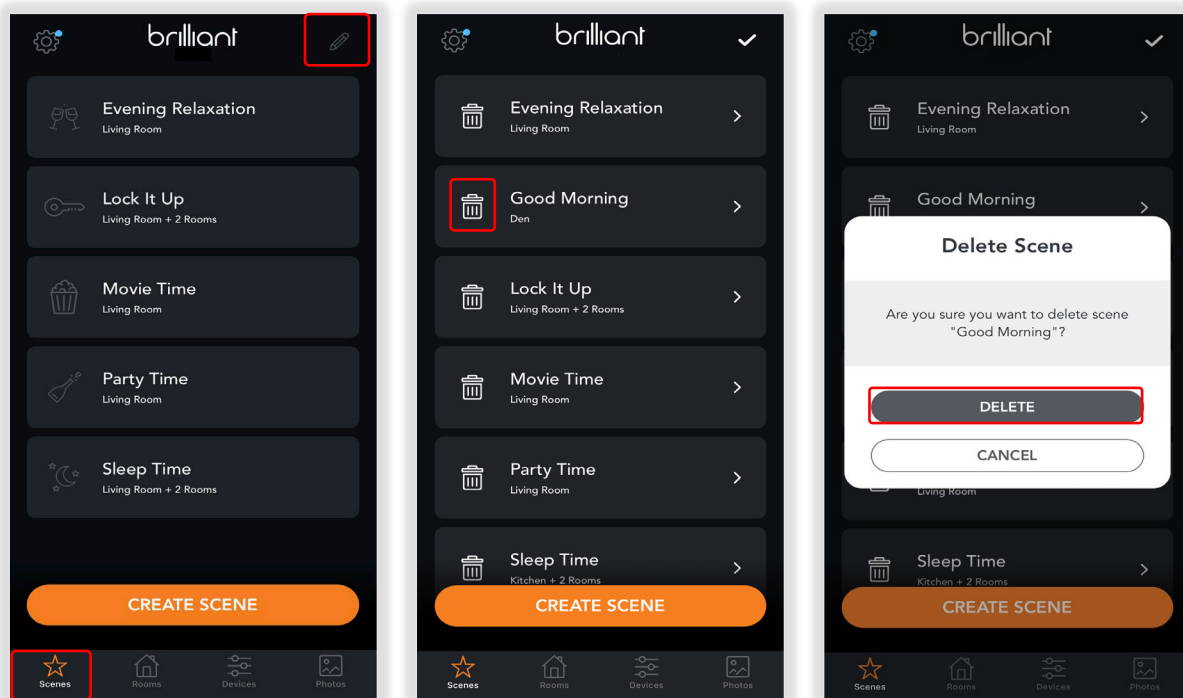

APPENDIX

[APPENDIX A] ENABLE THIRD-PARTY INTEGRATION

- 1) Open the TaHoma North America App
- 2) SELECT the "Menu" icon in the bottom bar
- 3) SELECT "Third-Party Integration"
- 4) SELECT "Brilliant" to view the Integration Report
- 5) SELECT "Continue" at the Warning
- 6) SELECT "Enable/Refresh Integrations"
- 7) SELECT "OK"

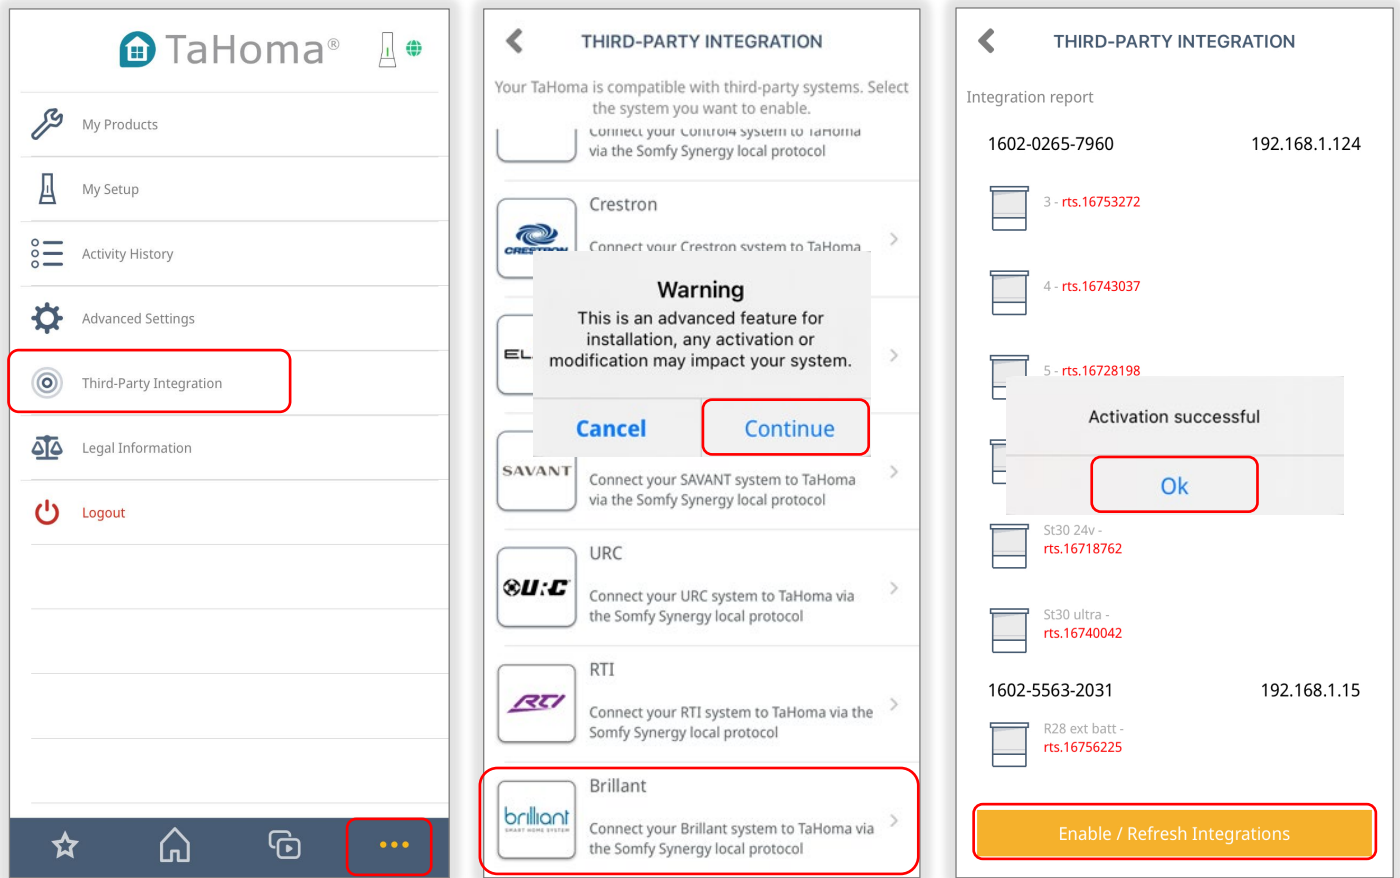

[APPENDIX B] AVAILABLE COMMANDS & ACTIONS

TAHOMA RTS COMMANDS	
Open	Moves blind to the fully open position
Close	Moves blind to the fully closed position
My	Moves blind to the programmed "my" position if blind is at rest
Tilt up	Tilts blind up (only available for tilt blinds)
Tilt down	Tilts blinds down (only available for tilt blinds)

ABOUT SOMFY

SOMFY® has been improving everyday life for more than 270 million people by designing and manufacturing intelligent motorization solutions for interior window coverings and exterior solar protections. Somfy innovates to automate and connect shades, blinds, draperies, awnings, rolling shutters, exterior screens & pergolas for commercial and residential buildings in 58 countries across the globe. With 170+ million motors produced over the last half century, Somfy is committed to creating reliable and sustainable solutions that promote the best way of living and well-being for all.

FOR QUESTIONS OR ASSISTANCE PLEASE CONTACT TECHNICAL SUPPORT:

(800) 22-SOMFY (76639)

technicalsupport_us@somfy.com

SOMFY SYSTEMS INC

SOMFY NORTH AMERICAN HEADQUARTERS

121 Herrod Blvd.

Dayton, NJ 08810

P: (609) 395-1300

F: (609) 395-1776

FLORIDA

1200 SW 35th Ave.

Boynton Beach, FL 33426

F: (561) 995-7502

CALIFORNIA

15301 Barranca Parkway

Irvine, CA 92618-2201

F: (949) 727-3775

SOMFY ULC

SOMFY Canada Division

6411 Edwards Blvd

Mississauga, ON L5T 2P7

P: (905) 564-6446

F: (905) 238-1491

www.somfypro.com

A BRAND OF **SOMFY** GROUP

